

### Qingdao Todo Rubber Co., ltd

Qingdao Todo Rubber Co., Itd is the ISO 9001:2015 verified manufacturer of rubber extrusion profile.

The material for rubber extrusion profiles are EPDM, CR, NBR, Silicone, Viton, PVC, TPE, TPV and so on.

Rubber Extrusion Profiles:

- Solid Rubber Profiles
- Sponge Rubber Profiles
- Glazing Profiles
- Window and Door Sealing Profiles
- Silicone Extrusion Profiles
- TPE Extrusion Profiles
- PVC Edge Trim
- Trim Seal / Pinchweld Seals
- Self Adhesive Rubber Strip
- Container Door Seal
- Rubber Fender
- O-Ring Cord



#### Solid Rubber Profiles

Material: EPDM, CR, NBR, Silicone, Viton, PVC, TPE, TPV
Hardness: 40 - 90 ShA
Color: Black mostly, OEM colors are available.
Application: Automotive, Building and Construction, Transportation, Aluminum

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

Package: 50 meters per roll mostly, pack into carton box.Service: Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.






## Sponge Rubber Profiles

Material: EPDM, CR, NBR, Silicone.
Density: 0.6 g/cc to 0.8 g/cc
Color: Black, Red, Green, Brown, Gray, Yellow available.
Application: Automotive, Building and Construction, Transportation, Aluminum.

**Certification:** ISO 9001: 2015, RoHS, **Standard:** According to drawings or samples.

**Package:** 50 meters per roll mostly, pack into carton box. **Service:** Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.

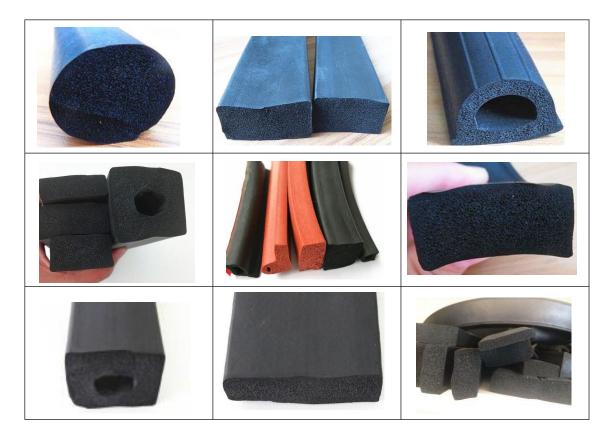



### **Glazing Profiles**

Material: EPDM, Silicone, PVC, TPE, TPV.
Hardness: 40 - 90 ShA
Color: Black mostly, OEM colors are available.
Application: Windows, Doors, Glass, Aluminum, Construction and Glazing industry.

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

**Package:** 50 meters per roll mostly, pack into carton box. **Service:** Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.






# Window and Door Sealing Profiles

Material: EPDM, Silicone, PVC, TPE, TPV.
Hardness: 40 - 90 ShA
Color: Black mostly, OEM colors are available.
Application: Automotive, Building and Construction, Transportation, Aluminum.

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

**Package:** 50 meters per roll mostly, pack into carton box. **Service:** Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.

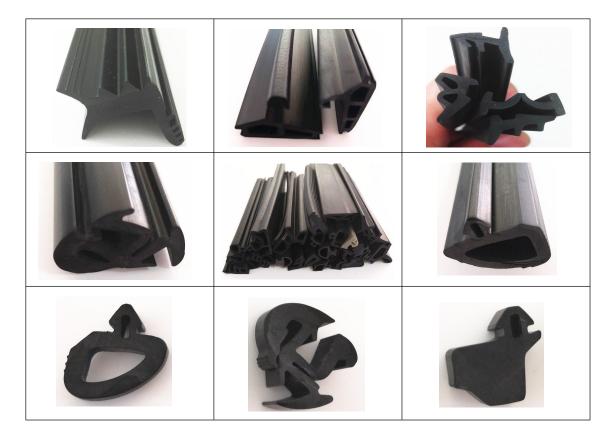




### Silicone Extrusion Profiles

Material: Silicone
Hardness: 15 - 90 ShA
Color: Black, Red, Green, Yellow, Blue, Brown, Gray, other OEM colors available.
Application: Automotive, Food and Medical Industry, Construction, Transportation.

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

**Package:** 50 meters per roll mostly, pack into carton box. **Service:** Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.

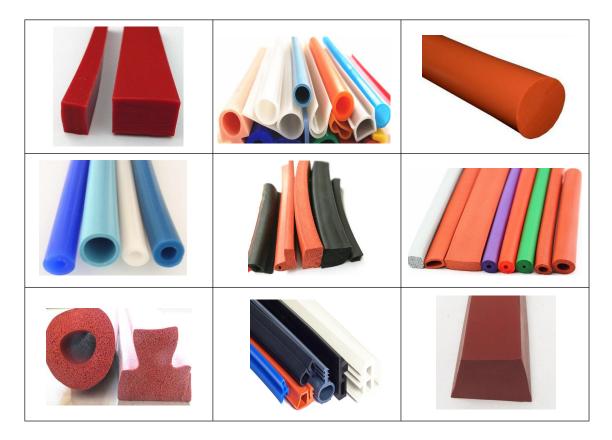



### **TPE Extrusion Profiles**

Material: TPE, TPV. Hardness: 40 - 90 ShA Color: Black, Red, Green, Yellow, Blue, Brown, Gray, other OEM colors available. Application: Automotive, Building and Construction, Transportation, Aluminum.

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

**Package:** 50 meters per roll mostly, pack into carton box. **Service:** Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.





### PVC Edge Trim

Material: PVC Hardness: 40 - 90 ShA Color: Black, Red, Green, Yellow, Blue, Brown, Gray, other OEM colors available. Application: Automotive, Building and Construction, Transportation, Aluminum.

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

**Package:** 50 meters per roll mostly, pack into carton box. **Service:** Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.






#### Trim Seal / Pinchweld Seals

Material: EPDM Hardness: 15 - 90 ShA Color: Black mostly. Application: Automotive, Building and Construction, Transportation, Aluminum.

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

**Package:** 50 meters per roll mostly, pack into carton box. **Service:** Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.

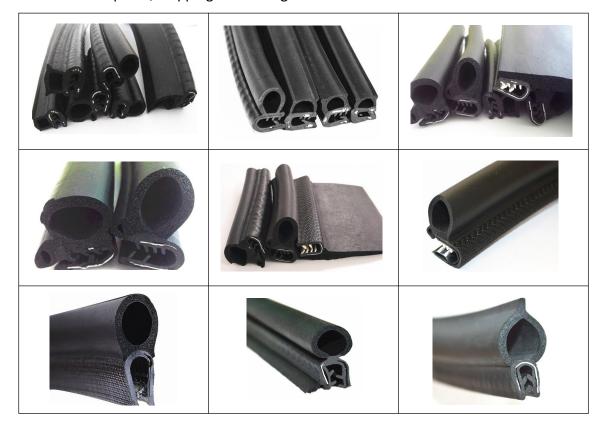



### Self Adhesive Rubber Strip

Material: EPDM, CR, NBR, Silicone, Viton.
Hardness: 15 - 90 ShA
Color: Black mostly, OEM colors are available.
Application: Automotive, Building and Construction, Transportation.

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

**Package:** 50 meters per roll mostly, pack into carton box. **Service:** Cutting to special length, welding to endless ring, tapping, OEM carton box, Euro standard pallet, Shipping mark design.






#### **Container Door Seal**

Material: EPDM, PVC Hardness: 15 - 90 ShA Color : Black, Grey, White. Application: Shipping container, Truck.

**Certification:** ISO 9001: 2015, RoHS. **Standard:** According to drawings or samples.

**Package:** 3 m/pc or 5m/pc, pack into carton box. **Service:** Cutting to special length, OEM carton box, Euro standard pallet, Shipping mark design.

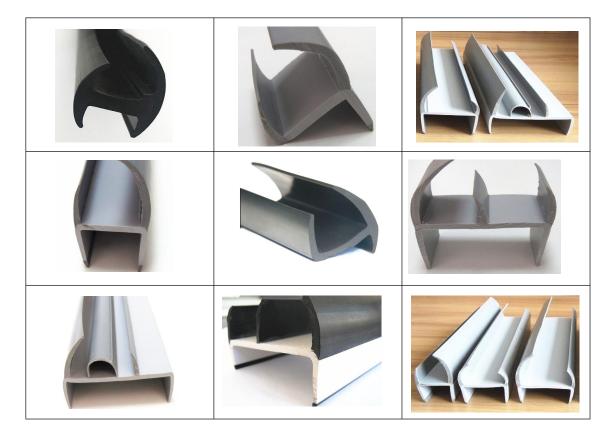



### **Rubber Fender**

Rubber fender mostly used for marine, road safety application.

Considering the weather resistance and pound power, the content of rubber fender is most import issue for the performance.

We can do D-fender with holes, customer moulded fender, round rubber fender, cone rubber fender.

Certification: ISO 9001: 2015, RoHS





### O-Ring Cord

O-Ring Cord is supplied as a continuous extruded cord and can be used to make custom sized O-Rings when standard sizes are not suitable.

These cords can be supplied in coil form, cut to length or joined into O-Rings.

Size: From 2 mm - 30 mm Material: NBR, EPDM, CR, FKM, VMQ. Hardness: 60-85 ShA Color: Black, Red Oxide.

**Certification:** ISO 9001: 2015, RoHS. **Package:** Roller package or as per customers' requirement.





#### Workshop

Before starting to produce goods, quality control department will test property of these rubber sheet in lab.

Qualified rubber sheet will be put into production line. Unqualified rubber sheet will be returned.





#### Laboratory





### Warehouse and Package

For the package, usually the standard is 50 m/roll.

We can also pack as per customer's requirement, such as cut 1 m/pc.

OEM carton box available.

